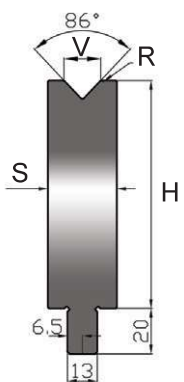

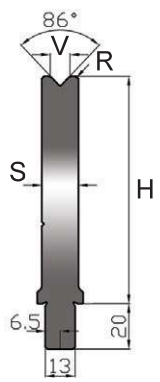




PRESS BRAKE TOOLS FACTORY CATALOGUE



86°		codice articolo item code	V mm	R mm	H mm	S mm	max kN/mt
		UST100N-S/86°V04	4	0,6	100	8	250
		UST100 N / 86° V06	6	0,6	100	20	1200
		UST100 N / 86° V08	8	0,8	100	20	1150
		UST100 N / 86° V10	10	1,0	100	20	1100
		UST100 N / 86° V12	12	1,0	100	25	1200
		UST100 N / 86° V16	16	1,6	100	30	1200
		UST100 N / 86° V20	20	2,0	100	30	1150
		UST100 N / 86° V24	24	2,5	100	35	1200
		UST100 N / 86° V30	30	3,0	100	45	1200
		UST100 N / 86° V40	40	3,0	100	55	1200
		UST100 N / 86° V50	50	3,0	100	75	1500
		UST150 N / 86° V06	6	1,6	150	20	1200
		UST150 N / 86° V08	8	2,0	150	20	1150
		UST150 N / 86° V10	10	2,5	150	20	1100
		UST150 N / 86° V12	12	3,0	150	25	1200
UST150 N / 86° V16	16	3,0	150	30	1200		
UST150 N / 86° V20	20	3,0	150	30	1150		
acciaio - steel		42CM4 T HRC 52+58		lunghezze - lengths		mm 500 - fraz C - M	

86°		codice articolo tem code	V mm	R mm	H mm	S mm	max kN/mt	
		UST100N-S/86°V08	8	2,5	100	16	400	
		UST150N-S/86°V12	12	3,0	100	20	1200	
acciaio - steel		42CM4 T HRC 52+58		lunghezze - lengths		mm 515 - fraz M		

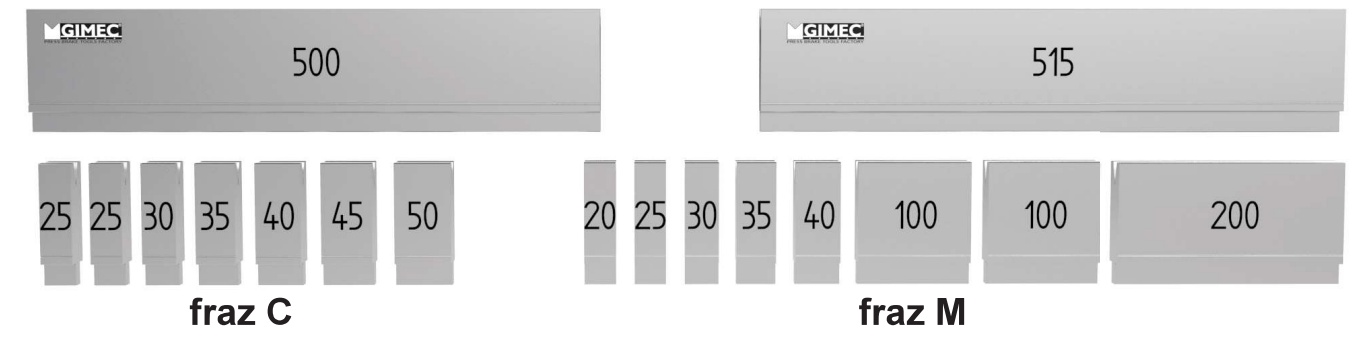
80° 60°		codice articolo item code	V mm	R mm	H mm	S mm	max kN/mt		
		UST150 N / 80° V24	24	2,0	150	35	1000		
		UST150 N / 80° V30	30	5,0	150	45	900		
		UST150 N / 80° V40	40	5,0	150	55	1200		
		UST150 N / 80° V50	50	5,0	150	75	1500		
		UST100 N / 80° V60	60	5,0	100	75	1500		
		UST100 N / 80° V70	70	5,0	100	85	1500		
		UST100 N / 80° V80	80	5,0	100	100	1500		
		UST120 N / 80° V90	90	8,0	120	110	1500		
		UST120 N / 80° V100	100	8,0	120	120	1500		
		UST120 N / 60° V120	120	8,0	120	145	1000		
		acciaio - steel		42CM4 T HRC 52+58		lunghezze - lengths		mm 500 - fraz C - M	

30°		codice articolo item code	V mm	R mm	H mm	S mm	max kN/mt	
		UST100 N / 30° V06	6	0,6	100	20	400	
		UST100 N / 30° V08	8	1,0	100	20	400	
		UST100 N / 30° V10	10	1,0	100	20	400	
		UST100 N / 30° V12	12	1,0	100	25	400	
		UST100 N / 30° V16	16	1,6	100	30	500	
		UST100 N / 30° V20	20	2,0	100	35	600	
		UST100 N / 30° V24	24	2,5	100	40	650	
		UST100 N / 30° V30	30	3,0	100	55	900	
		UST100 N / 30° V40	40	5,0	100	60	900	
		UST150 N / 30° V06	6	0,6	150	20	400	
		UST150 N / 30° V08	8	1,0	150	20	400	
		UST150 N / 30° V10	10	1,0	150	20	400	
		UST150 N / 30° V12	12	1,0	150	25	400	
		UST150 N / 30° V16	16	1,6	150	30	500	
		UST150 N / 30° V20	20	2,0	150	35	600	
		UST150 N / 30° V24	24	2,5	150	40	650	
		UST150 N / 30° V30	30	3,0	150	55	900	
		UST150 N / 30° V40	40	5,0	150	60	900	
	acciaio - steel	42CM4 T HRC 52+58	lunghezze - lengths	mm 500 - fraz C - M				

30°		codice articolo item code	V mm	R mm	H mm	S mm	max kN/mt
		UST100N-S/30°V06	6	2,0	100	16	400
		UST100N-S/30°V08	8	2,5	100	16	400
		UST100N-S/30°V10	10	2,5	100	20	400
		UST100N-S/30°V12	12	3,0	100	20	400
acciaio - steel	42CM4 T HRC 52+58	lunghezze - lengths	mm 515 - fraz M				

LUNGHEZZE • LENGTHS mm 500 - 515 - fraz C250 - M550

L mm	25	30	35	40	45	50	100	200				tot.pz/pcs
fraz C	250	2	1	1	1	1	1					7
fraz M	550	2	1	1	1	1	1	1	1			9



STANDARD TOOLS
serie 13 UST®